


Pk-LINE-Belt-Horizontal

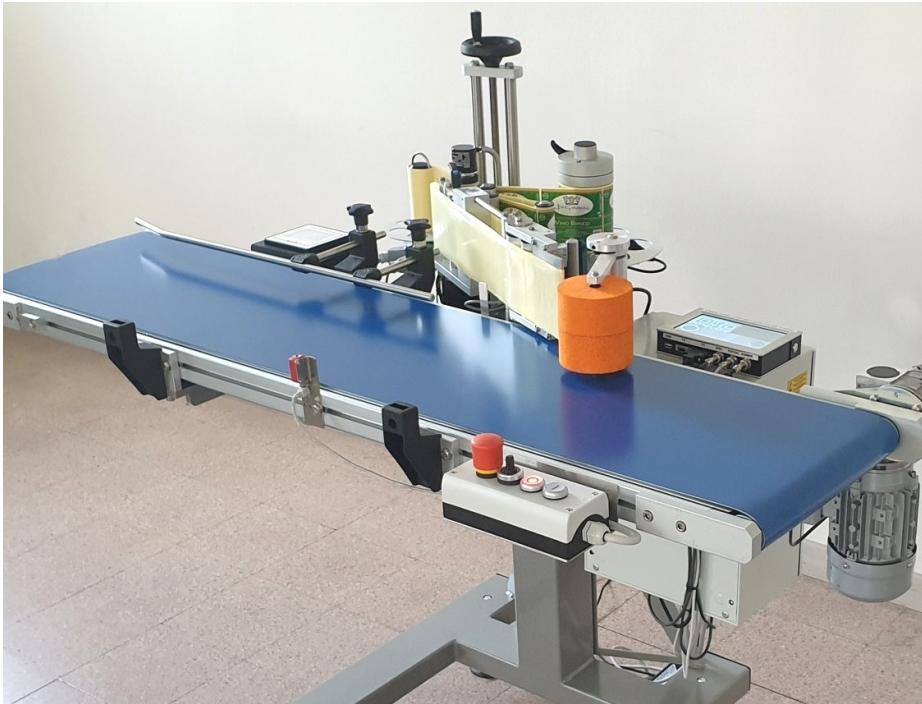

DESCRIPTION

Pk-LINE-Belt-Horizontal with cantilevered support frame allows easy installations in the most varied needs. Products up to 320mm wide can be handled. The labelling head can apply labels on the side of products for labels from 20 to 100mm (Pk-X) or from 20 to 150mm (Pk-X-150). The conveyor belt is adjustable in speed from 0 to 30 m/min. and thanks to SYNCRO technology (exclusive to Packin) no adjustment is required by changing speed from the operating control panel located on the operator's side. Once the programs of the various formats have been stored in the color touch-screen control panel (up to 100 programs) the operator has full control of the machine using only the control panel on the operator's side with extreme simplicity. The panel has

DESCRIPTION

the start, stop, speed adjustment, emergency button controls, Syncro technology takes care of the rest. As on all Packin machines, it is possible to install inkjet markers for printing variable data. From 12,7 up to 50,8mm of printing area with 7" or 10" (inch) panel with memory up to 1000 files. The markers are controlled directly from the machine's colour touch-screen panel, allowing the print position to be adjusted and stored. The print position is regular with the same size and position on the label, synchronized with the movement of the paper. Various types of inks are available to cover almost all needs and types of porous or non-porous materials. Pk-LINE-Belt-Horizontal is available with right or left direction of travel.

TECHNICAL FUTURES

DESCRIZIONE	Pk-LINE-Belt-Horizontal	Pk-LINE-Belt-150-Horiz.
Label width	From 20 to 100mm	From 20 to 150mm
Label length	From 20 to 620mm	From 20 to 620mm
Roll diameter external	Up to 250 mm	Up to 250 mm
Roll diameter internal	45/76 mm	45/76 mm
Definition	+/- 1mm	+/- 1mm
Two labels on product	Si	Si
Positioner horizontal	Yes, with knob	Yes, with knob
Positioner vertical	Yes, with knob	Yes, with knob
Inkjet coder, marker	Optional up to 25,4mm	Optional up to 25,4mm
Transparent labels photocell	Optional	Optional
Transparent label products	Yes	Yes
Speed	Up to 30mt/min	Up to 30 mt/min
Speed frequency	Up to 100 pcs/min	Up to 100 pcs/min
Power	220/110 Vac 400 W	220/110 Vac 400 W
Alarm	End of reel, paper break, external equipment connection	End of reel, paper break, external equipment connection
Weight	100 Kg	110 Kg
Dimension	150x80x180H. cm	150x80x180H. cm