
## COMPACT AUTOMATIC LABELLING MACHINE

## Pk-X and Pk-X 150

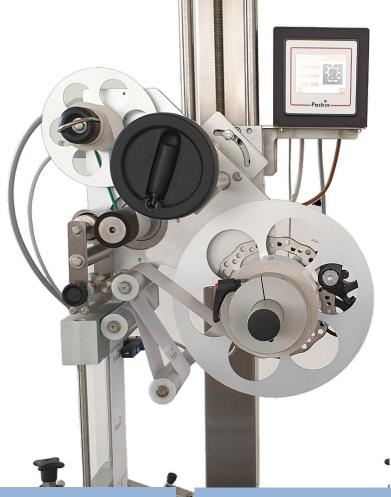

## **DESCRIPTION**

Compact automatic labelling machine 100mm. Colour touch-screen controller 50 programs, all standard functions. 250mm reel holder; exclusive disc brake; positioner with integrated lever. Up to 100 pcs / min, up to 40 mt / min.

Pk-X is a very compact labelling head that can be easily inserted into all automatic lines. It is in fact the machine used in our automatic lines. It can be equipped with inkjet marker and photocell for transparent labels. Head management is entrusted to the 3.5 "colour touch-screen controller that allows you to make the best use of all the machine functions such as programs, management of the encoder for automatic speed adjustment, of the encoder for the adaptation of inkjet printing, the In / Out for the manage-

## **DESCRIPTION**

ment of external machinery or traffic lights to signal functions. Pk-X is built in stainless steel and very thick aluminium, very robust and equipped with an exclusive disc brake for the management of the paper tension that optimizes the functionality, also offering the possibility to use reels with internal or external winding without any difference. End of reel control and flaa label emission included.

TECHNICAL CHARACTERISTICS		
DESCRIPTION	Pk-X	Pk-X 150
LABEL DIMENSION	from 20 to 100mm	from 20 to 150mm
LABEL LENGTH	From 20 to 620mm	From 20 to 620mm
ROLL DIMENSION INT/EXT	45-76 / 250mm	45-76 / 250mm
DEFINITION	+/- 1mm	+/- 1mm
2 LABELS ON PRODUCT	yes	yes
POSITIONER WITH KNOB	Yes, 400 mm integrated	Yes, 400 mm integrated
INKJET COLOR PINTER CONNECTION	Yes, optional	Yes, optional
INKJET CODER	Yes, optional	Yes, optional
TRANSPARENT LABELS	Yes, optional	Yes, optional
SPEED	Up to 40 mt/min	Up to 40 mt/min
PRODUCTIVITY	Ip to 100 pc/min.	Ip to 100 pc/min.
POWER	220/110 Vac 400 W	220/110 Vac 400 W
ALARMS	End roll, paper brocken	End roll, paper brocken
WEIGTH	15 Kg	19 Kg
DIMENSIONS	40x50x66 cm	40x60x66 cm

