


## AUTOMATIC LINE LABELLING MACHINE

# Pk-LINE-Easy R-V

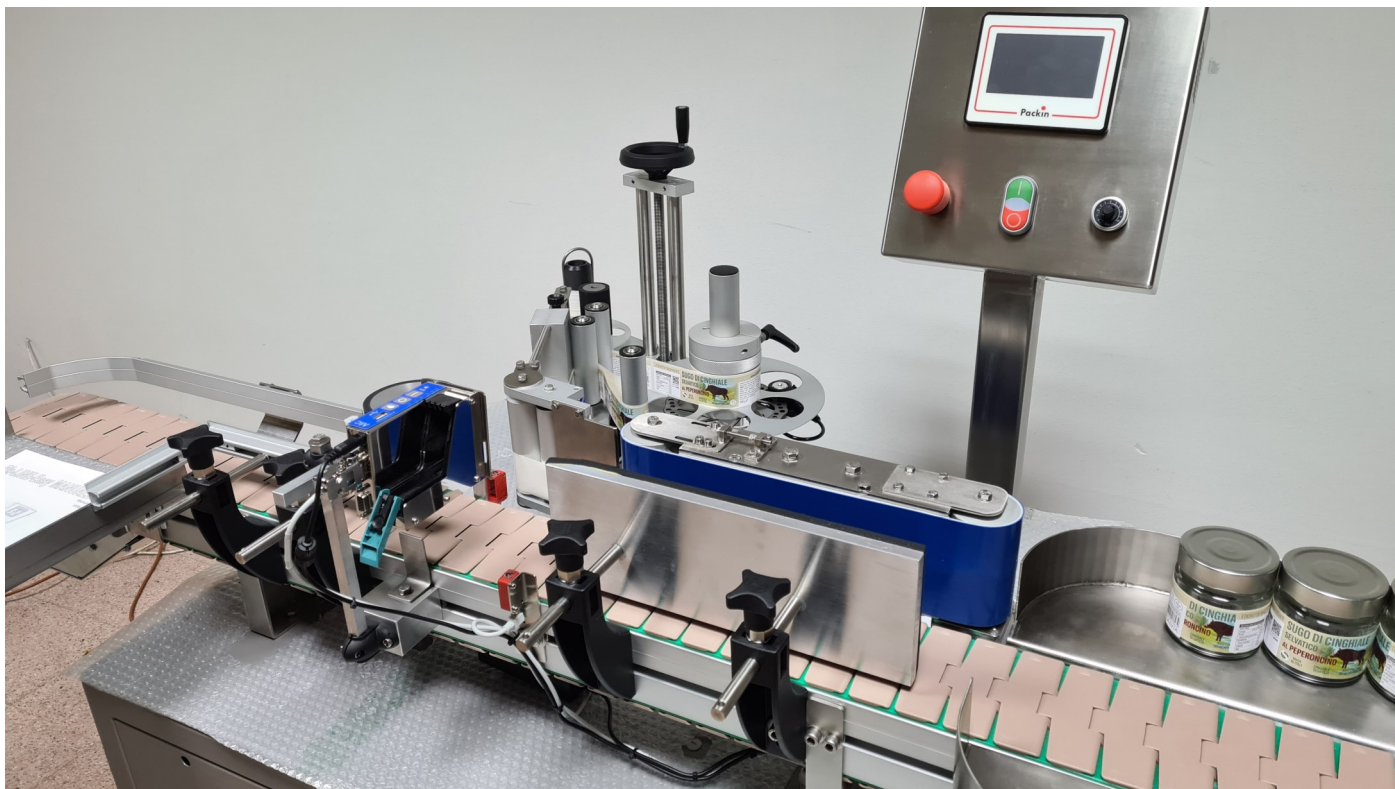

### DESCRIPTION

Pk-LINE-Easy-R-V (Roto Vertical) is an automatic machine for the application of labels built for industrial work cycles. It can apply a wrap-around label around round products. It uses high quality brushless motors, a color touch-screen control panel, 100 programs and much more, placing it at the top of the quality for this category. Various accessories are available such as the inkjet marker for variable data printing, photocell for transparent labels, etc. Pk-LINE-Easy, fast, compact, high quality, made in Italy, excellent quality / price ratio. Available in version for 1200mm or 150mm height labels. Pk-LINE-R-V is equipped with advanced technical solutions to simplify ease of use as much as possible. It uses encoders for the automatic adjustment of the speed of the labelling head in relation to the speed of the roller belt. In practice, the operator suffices the label measurement and application start delay data to be entered in the control panel to start production. Pk-LINE-Easy is also available in the R-R (Roto Rollers) version with rubberized rollers for rolling the product for the application of one or two wrapping labels.

### TECHNICAL CHARACTERISTICS

DESCRIPTION	R-V 100	R-V-150
Product diameter	from 20 to 100 mm	from 20 to 100 mm
Label width (height on product)	from 20 to 100 mm	From 20 to 150 mm
Label length	from 20 to 400 mm	from 20 to 400 mm
Roll dimension	Int. 45-76 / ext. 250 mm	Int. 45-76 / ext. 250 mm
Precision	+/- 1 mm	+/- 1 mm
Speed	Up to 30 mt/min	Up to 30 mt/min
Applying frequency	Up to 100 pz/min depending on label and vase dimensions	Up to 100 pz/min depending on label and vase dimensions
Front/rear label	No	No
Command panel	Touch screen a colour	Touch screen a colour
Storage	100 programs	100 programs
Alarm	reel end, paper breaking, external machinery control	reel end, paper breaking, external machinery control
Encoder auto adjust speed	yes	Si
Inkjet coder	yes, optional	yes, optional
Transparent label	yes, optional	yes, optional
Exit plate	yes	yes
Power	220Vac 50/60Hz 500 Watt	220Vac 50/60Hz 500 Watt
Feeding plate	Yes, optional 350x500 mm	yes, optional 350x500 mm
Compressed air	No	No
Weight	120 Kg	120 Kg
Dimensions	200x85x160H. cm	200x85x160H. cm

**Packin**